




9000 Series

TA9000L-FG-2030

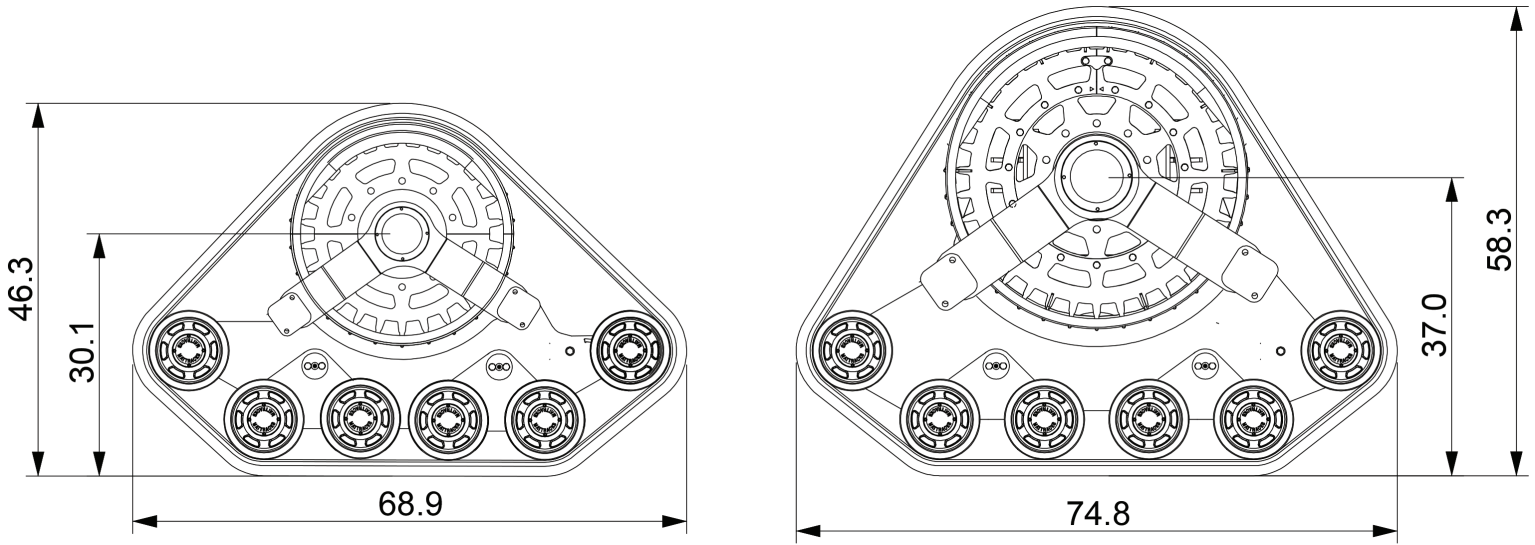

Exclusive Anti-Torque System	Rubber Torsion
Frame Construction	HSLA Steel
Recommended Max Gross per corner	Front: 5,000 lbs / Rear 7,500 lbs
Internal Suspension	Concentric Pivot w/Independent Offset Rocker Arm
Track Tread Width	Front: 20" / Rear: 30"
Tread Style	All-Terrain Self-Cleaning
Track Material	Rubber with Internal Composite Rods and Cord
Recommended Operating Temperature	(Ambient) -40°F to +130°F (-40°C to +55°C)
Axle Height	Front: 30.1" / Rear: 37.0"
Ground Contact Area (3" Depression)	4,968 in ²
Corners	4
Sprocket Diameter	Front: 29" / Rear: 39"
Wheels (Shielded & Sealed Bearings)	Front: (16) 2.5" x 10" / Rear: (16) 2.5" x 10"
Recommended Max Speed**	15 mph
Turning Radius	Same as original vehicle
Max Operating Side Slope (Grade)*	25%
Terrain	All-Terrain Including Hard Surface at GVW
Max Distance Off-Road	Indefinite
Max Distance Hard Surface**	At Below 80°F (26°C): Indefinite
At Above 80°F (26°C)	15 Miles at Max Speed

*DEPENDING ON VEHICLE, CARGO, AND ACCESSORIES **SOME VEHICLES MAY REQUIRE SLIGHT ALTERATIONS
 ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION

