


TA9090HD-NN-2424

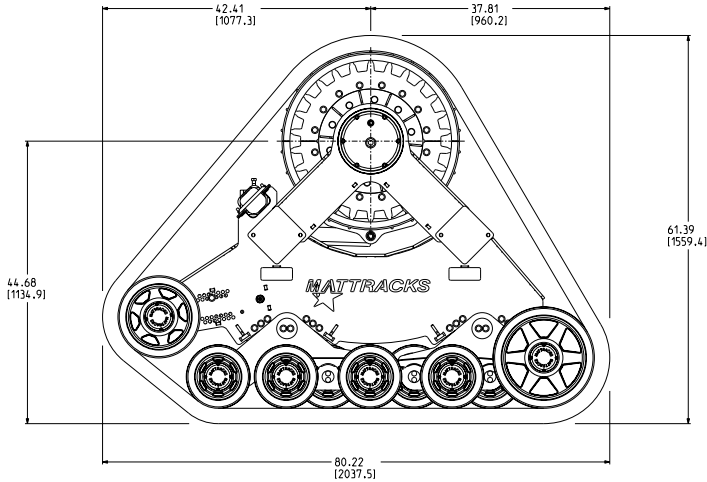

	Front Track	Rear Track
EXCLUSIVE ANTI-TORQUE SYSTEM		Rubber Torsion
FRAME CONSTRUCTION		HSLA Steel
ASSEMBLY WEIGHT	5,800 lbs	5,800 lbs
RECOMMENDED MAX GROSS	35,000 lbs	35,000 lbs
INTERNAL SUSPENSION	Concentric Pivot w/ Rocker Arm	
TRACK TREAD WIDTH	24"	24"
TRACK TREAD STYLE	All-Terrain Self-Cleaning	
TRACK MATERIAL	Rubber with Heavy Duty Internal Rods and Cord	
RECOMMENDED OPERATING TEMP	(Ambient) -40°F to +130°F (-40°C to +55°C)	
AXLE HEIGHT	44.68 in	44.68 in
GROUND CONTACT AREA	3,200 sq in (at 3" depth)	3,200 sq in (at 3" depth)
CORNERS	4	
SPROCKET DIAMETER	29"	29"
WHEELS (SHIELDED & SEALED BEARINGS)	4.5" Wide (12) 10", (2) 13", (2) 16"	4.5" Wide (12) 10", (2) 13", (2) 16"
TURNING RADIUS	Same as original vehicle	
MAX OPERATING SIDE SLOPE (GRADE)	25%	
TERRAIN	All	