


## HT 500

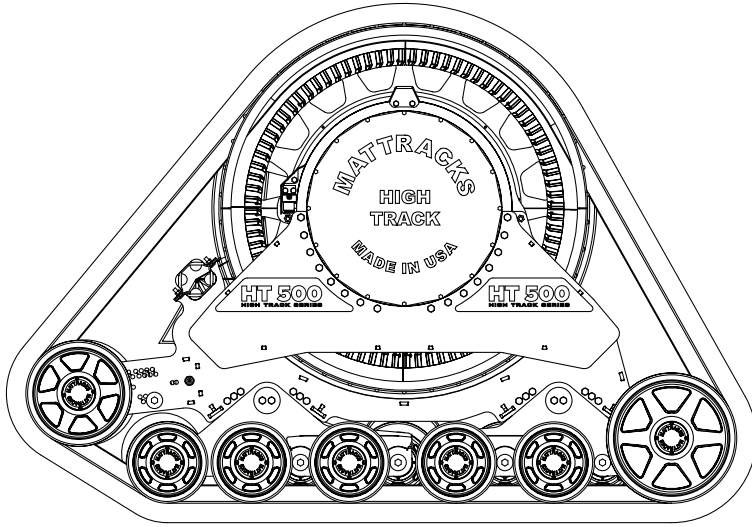

ALL SPECS ARE PER CORNER

<b>EXCLUSIVE ANTI-TORQUE SYSTEM</b>	Rubber Torsion
<b>FRAME CONSTRUCTION</b>	HSLA Steel
<b>RECOMMENDED MAX GROSS</b>	12,500 lbs
<b>INTERNAL SUSPENSION</b>	Concentric Pivot, w/ Independent Offset Rocker Arm
<b>TRACK TREAD WIDTH</b>	15 in
<b>TREAD STYLE</b>	All-Terrain, Self-Cleaning
<b>TRACK MATERIAL</b>	Rubber with Internal Composite Rods/Cord
<b>RECOMMENDED OPERATING TEMPERATURE</b>	(Ambient) -40° to +130°
<b>AXLE HEIGHT</b>	38.6 in
<b>GROUND CONTACT AREA (3" DEPRESSION)</b>	1,145 in <sup>2</sup>
<b>CORNERS</b>	4
<b>SPROCKET DIAMETER</b>	47 in
<b>WHEELS (SHIELDED &amp; SEALED BEARING)</b>	4.5" Wide - (5) 10" / 2.5" Wide - (10) 10", (2) 13", (2) 16"
<b>RECOMMENDED MAX SPEED<sup>a</sup></b>	15 mph
<b>TURNING RADIUS</b>	Same as original vehicle
<b>MAX OPERATING SIDE SLOPE (GRADE)<sup>b</sup></b>	25%
<b>TERRAIN</b>	All-Terrain Including Hard Surface at GVW
<b>MAX DISTANCE OFF-ROAD</b>	Indefinite

<sup>a</sup> SEE SYSTEM MANUAL FOR FURTHER GUIDANCE ON RECOMMENDED OPERATING SPEEDS - <sup>b</sup> DEPENDING ON VEHICLE, CARGO, AND ACCESSORIES  
ALL SPECIFICATIONS ARE APPROXIMATE AND WE RESERVE THE RIGHT TO MAKE CHANGES OR MODIFICATIONS WITHOUT NOTIFICATION